

State of the Art of the Different Models of Transportation Most Used in the Supply Chain of Automotive Industry

Gabriel Policroniades Chípuli, Idalia Flores de la Mota
Universidad Nacional Autónoma de México

gpolicroniadesch@gmail.com, idalia@unam.mx

Abstract. Recently, automobile manufacturers are trying to procure parts using the Milk-Run logistics at most of their nearby suppliers and others kinds of consolidation applied to their distribution system with far suppliers. This article shows generally a state of art of this kind of consolidation used in the automotive industry. However, it is important to mention that the process of Milk-Run does not apply to all levels of the supply chain; only between the shipbuilder and nearby suppliers. All this leaves devoid of a transport mechanism of equal magnitude to the other levels or supply chain; allowing the modeling of different transport models that provide solutions to each specific distribution system depending on the type of consolidation. These models are based on the vehicle routing problems (VRP) and its various aspects; which are mentioned in this work.

Keywords: Milk-Run, Consolidation, Automotive Industry, VRP

1. Introduction

The automotive industry, is considered as "the industry of the industries" [1], due to its high level of consumption and requirements of thousands of components from all over the world [2]. The classic vision of having suppliers nearby or making the products 100% independently was lost over time; in search of the optimization of the processes. With suppliers from all over the world, the reduction of raw material costs is another important factor generated as a consequence of this situation; in response to this, the supply chain in automotive sector presented radical improvements to the existing classical processes, generating a vision for supply chain management rather than manufacturing [3], [4].

During the 20th century, as mentioned in [5], the automotive industry has been a major contributor to supply chain management. One of the most important applications in this sector has been the use of the Milk-Run concept, or "Milk Cow" as a system of consolidation of finished product between the manufacturing companies [6]. Another definition of this type of system is shown by [7]; who defines it as a cyclical transport system which is operated manually to transport raw material or finished product through a settled down route or schedule. This type of transport is advisable to use when suppliers are located at a close distance between them. However, [8] identifies three types of product consolidation existing in this type of sector.

This paper is organized as follows, in section 2 will be found the state of the art of the three types of consolidation of the finished product in the automotive sector; However, due to the high complexity of the supply chain, some of these consolidation models present mixtures between them or variants that are applicable only to a particular company; Which indirectly leads to the analysis of the vehicle routing problem. In section 3, will be analyzed some problems that cannot be approached by the models previously mentioned; making necessary the use of another technique like the sciences of complexity.

2. State of the Art

Prior to the state of the art, the process by which the delivery of the finished product is logistically performed consists of three different parts; The first of them, the request of the order; The second, the logistics logistic process; And the third stage, the return of empty containers if there is such a process [9].

Nemoto et al., (2010) identify three main types of distribution of the finished product in the automotive sector based on the consolidation process; The first of them, the Milk-Run logistics process; The second, consolidation at the point of shipment of the supplier; And the third, consolidation at a cross-dock.

Boysen et al. (2015) state that these types of consolidation and delivery are governed by the JIT (Just In Time) factor demanded by auto parts suppliers in order to comply in a timely manner with product delivery. Another aspect that could be observed within these transport models is the multimodal factor, which mentions it [10] within the automotive sector, or any type of industry with similar distribution models.

Lawson et al. (2016) on the other hand, mentions that many of the logistical aspects can be considered during the design process of the vehicle looking for a significant cost reduction from the beginning; which he calls Development by Virtual Reality within the automotive sector; visualizing the whole system in particular.

2.1 Milk-Run

This model of transport, as already mentioned, is also known under the name of "Milk Cow System", based on the milk sales system, in which the milkman walks door-to-door delivering the milk in established route in which in the end will travel the same route to collect the empty containers [6].

Nemoto et al. (2010) explain that the importance of the Milk-Run lies in the synchronization between the manufacturing cells and the transport process under the JIT regime. That is, only the delivery of the necessary parts for the production is carried out drastically reducing the inventories and the pieces possibly defective; another important feature of this factor lies in the search for the minimization between the quantity produced and the quantity demanded.

One consideration, which is done when carrying out this type of transport, lies in a Lean transport process, under the concept of lean manufacturing, using the Kanban concept [12]. This ensures that quantity of the product demanded is exactly what is needed to meet the production requested; leading indirectly towards an ecological policy by reducing the number of containers and the CO2 emissions caused by the use of vehicles [2], [8], [6].

Prior to the introduction of the "Milk-Run", the distribution and collection were carried out in a classic way, what means that a vehicle for delivery and a vehicle for collection; which is mentioned in [6] and [13]. As a result, they had a generation of a bigger use of vehicles and a lack of optimality in the spaces of a load of the vehicles; which contrasts it [14] with the Milk-Run.

On the other hand, [6], they comment that one way to alleviate the problems of transport between the manufacturers and near providers, is the use of this model of transport; Which, according to the authors, generates an economic benefit when, through the travel of a vehicle, it is possible to collect the finished product from several suppliers, before reaching its maximum load capacity for delivery at the end client.

Yun et al. (2010) analyze the interaction between the inventory control and the transport model using a genetic algorithm applied to the Milk-Run. Hosseini et al. (2014) develops an entire programming model for a Milk-Run model with the characteristic of a Cross-Docking; however, because of the complexity of the problem, it is necessary to develop a hybrid heuristic algorithm that would allow him to find a solution; for its analysis makes the assumption that all vehicles have the same capacity. Their results, obtained through GAMS / CPLEX, obtain the exact values of 10 instances; while the hybrid algorithm achieves practically the same results improving execution times remarkably.

2.2 Consolidation at the Transfer Point

This process, as mentioned [8] occurs when there are two or more manufacturers or plants that depend on a single supplier. In this case, the merchandise is consolidated at the point of departure of the supplier and distributed to different points; which can be located both near and far.

2.3 Cross Dock Consolidation

A cross-dock, as defined [16] is a point where materials are unloaded from incoming vehicles and loaded into a vehicle with a defined route to a customer. In this regard, a provider could have such points on their distribution channel. An important feature of these is that their location must be carefully analyzed in order to be as close as possible to the desired end point. On some occasions, these points can get to operate as 3 "Party Logistic Firm" (3PL); That is to say, places where the products are almost assembled and in these, the assembly is completed or the load is consolidated.

Klincewicz et al. (1990) refers to the use of one or more points of consolidation as the way of generate savings in the long term. [16] develops a mixed programming model to solve a real case of the Bosch company to make a distribution model under two different premises; the first one, to create subgroups of supplier clients, where consolidation was carried out in the same location; and the second, using a crossdocking, which, it was observed that greater savings were obtained.

2.4 Some Related Transportation Models

The Milk-Run model is commonly used between the second and third tier of the supply chain; Being these levels focused to the main manufacturer and the manufacturer nearest with products that economically represent a saving in the use of this type of model.

On the other hand, a company may also have combined consolidation systems; That is, it may be within the consolidation regime of a Milk-Run if it is close to the main manufacturer; And have another delivery system if you have more customers at a greater distance. This effect generates a greater complexity in the transport model that will characterize it.

Andreatini et al. (2014) mentions that there is no generic mathematical model of the same magnitude as the Milk-Run for these levels; leaving to the freedom of these companies the creation of their transport models. These transport models have usually customized versions of the VRP depending on the individual problem.

In the transport models of the automotive sector, there is a factor that is repeated constantly; this factor is the environmental aspect [19] and [20] comment that a few decades ago the awareness of sustainable development was so strong that the transport models presented a substantial change in their development. As a response to this, the name of reverse logistic or green logistic is coined to all those processes in which there is a collection of waste or returnable products that return to their source; this policy is also called Reverse Logistic [21].

Das and Chowdhury (2012) mention in general that this type of logistics can be applied to the different consolidation methods mentioned above or through retailers. Nieuwenhuis et al. (2013) develops a study to identify, based on the impact of CO₂, how convenient it is to have suppliers within the same region, or with suppliers outside of it. Toro et al. (2016) shows a more detailed state of the art as illustrated in the present article starting from the different aspects of the VRP. Kumar (2013) and [26] perform a simpler classification; the first author starts from the VRP and covers a general classification of these models; While the second author focuses only on the VRP models with Collection and Delivery.

On the other hand, to these models mentioned above it is possible to add cargo accommodation restrictions within the vehicle body; some loading constraints and state-of-the-art analysis of these types of problems can be found in [27]. In figure 1, the aforementioned classification is schematically shown. Leung et al. (2013), they mention that customer demand is usually expressed in terms of volume or weight; to these considerations, it is possible to assign two or three dimensions of cargo within the box of a vehicle; depending on the type of container and its different stowage and fragility restrictions.

The two-dimensional problem, or 2L-CVRP; where the index 2L or 3L, as the case may be, is referred to the level of dimensions used to make a load accommodation according to [29]. With respect to the routing models mixed with load problems mentioned above, the work of [30] could be added, who carry out a detailed state of the art; It is shown in Table 1 that different contributions are presented and their scope in terms of the type of load restriction.

Table 1. Contributions related to different transport models mixed with loading problems, source based on [30].

References	a	b	c	d	e	f	g
[31]	✓	✓	✓	✓	✓	✓	✓
[32]	✓	✓	✓	✓	✓	✓	✓
[33]	✓	✓	✓	✓	✓	✓	✓
[34]	✓	x	✓	x	x	x	✓
[35]	✓	x	✓	✓	x	✓	✓
[36]	✓	x	✓	✓	x	✓	✓
[37], [38], [39]	✓	✓	✓	✓	--	--	✓
[40]	✓	✓	✓	✓	--	--	✓
[41]	✓	✓	✓	✓	--	--	✓
[42]	✓	✓	✓	✓	--	--	✓
[43]	✓	x	x	x	x	✓	x
[44]	✓	x	✓	✓	x	x	x
[45]	✓	✓	✓	x	x	✓	x
[46]	✓	✓	✓	✓	✓	x	x

Continuation of **Table 1.**

References	a	b	c	d	e	f	g
[47]	✓	✓	✓	X	X	X	X
[48]	✓	X	✓	✓	X	X	X
[49]	✓	X	✓	✓	X	X	✓
[50]	X	X	X	✓	X	X	✓
[51]	✓	X	X	✓	X	✓	X
[52]	X	X	X	✓	X	✓	X
[53]	X	X	✓	X	✓	✓	X
[54]	X	X	✓	X	✓	✓	X
[55]	X	X	✓	X	✓	✓	X
[56]	X	X	✓	X	✓	✓	X
[57]	X	X	✓	X	X	✓	X

Where:

- Classic Constraints of BPP (Container Load Problem): The elements cannot be stacked, but they must be contained in the box of the vehicle.
- Capacity Restrictions: The total sum of the weights of each package within a vehicle shall not exceed its total capacity.
- Orthogonality Restrictions: The packages must be loaded keeping them parallel with the walls of the vehicle box.
- Orientation Restrictions: The package must be placed in a fixed position inside the vehicle box.
- Fragility Constraints: Elements can be classified as fragile and non-fragile elements; The fragile cannot bear any weight.
- Stability Restrictions: When a package is located at the top, or on some other, stability of the packages should be ensured.
- LIFO load policy: This policy will allow the loading of the product as the delivery route is carried out.

3. Some cases not analyzed by these models

Gallotti and Barthelemy (2014) mention that in reality, transport problems can become so complex that when they are abstracted into mathematical models, they lose variables and interrelations that could be significant for a greater understanding of the system in general. One of the sciences that in the last years is addressing this type of problems and that considers all these characteristics, are the sciences of complexity. One proposal made by the authors is the use of multilayer networks for models with multiple types of transport; where each of the transport types generates a different layer in the general network. In addition, they mention that most of the complex systems existing in the real world tend to operate under the concept of multiplex network interacting with each other to result in the emergence of the system. Multi-layer networks allow the model to be abstracted including arcs and nodes with attributes and specific characteristics that cannot be realized in traditional network models.

Within these sciences, Complex Systems are located; For which there is no specific definition; however, there are features that make those easy to identify.

Some of these characteristics as mentioned in [60], [61], [62], [63] and [64]; are: Connectivity among its elements, interdependence, Diversity of agents, adaptability to changes in the environment, sensitivity to the initial conditions, and present a nonlinearity or emergence arising from the interactions between all its elements.

The first authors mention that a transport model can be represented like a network composed of interconnected arcs and nodes, where more characteristics of the system can be introduced with more detail if the concept of complex system is used; In this way, the authors propose that if one wishes to get closer to reality, one must try to address these problems by making use of the complexity sciences.

4. New contributions and research lines

The following section is based on the analysis performed by [65]; who develops a complete study of the state of the art of the different VRP models and their different solution techniques shown in table 2; In the table, a column with the updated articles corresponding to the year 2016 has been appended.

Table 2. Different solution techniques for diverse transport models in the literature; based on [65]

Applied Method	Number of Models	2009-2015	2016
		[65]	
Metaheuristic	247	233	14
Exact Method	4	56	4
Classical Heuristic	2	32	2
Real-Time-Solution Method	0	11	
Simulation	0	7	
* Other Techniques	1		1

In Table 2, an indicator named with other techniques can be identified; this is referred to other optimization methods than those mentioned; Or some combination of these. An example, is the work of [66] who proposes the use of agents with the ability to adapt, cooperate and search for new solutions as would a metaheuristic algorithm.

Based on this analysis, and in the study carried out by [27], it can be inferred that the evolution of the techniques used to solve this type of model has gone from the basic heuristics, to the hybridizations between metaheuristics. All this thanks to the technological advances of computers that allow us to solve increasingly complex problems, as seen in figure 2.

The use of metaheuristics techniques, as shown in Table 2 have been preferably used due largely to its great advantage over the exact techniques to find good solutions in reasonable times of execution [67].

The most recent in the field of metaheuristics is the use of hybridizations. Which bases its interest in improving the performance of the final algorithm by combining the best individual characteristics of its predecessors mitigating the opposite effects of being hybridized [68], [69].

Some applications of these techniques in transport models can be found in [70], which use a PSO (Particle Swarm Optimization) hybridized with a Variable Neighborhood Search algorithm to strengthen its level of intensification. As mentioned by the authors to solve a Vehicle Routing Problem with Simultaneous Pickup and Delivery; other application related to this kind of problems will be founded in [71] and [72].

Related to the subject of consolidations, it is possible to find the following applications:

Hosseini et al. (2014), perform an application that mixes the problem of consolidation of the product with the one of the routing of vehicles. The former solves it by means of the use of matrices that give the state of the warehouses and clients in terms of capacity and requirements; and the second, through the hybridization between a simulated annealing algorithm and a harmonic algorithm.

Du et al. (2007) propose the use of experiment design to develop scenarios to test the Milk Run system and select the best alternative for a real-time system.

Arvidsson (2013) reviews the impact of scheduled deliveries through the milk-run system on the environment and the economy; Arguing that in urban areas an average of between 20-30% of the vehicles that circulate are vehicles of load, contributing between 16% up to 50% in the emissions of CO₂ released to the atmosphere.

Hasani and Hessameddin (2016) apply a PSO algorithm to locate their cross-docks as close to their customers as possible to minimize the distances between them and the nearest delivery point.

Kuo et al. (2016) mention that a warehousing management policy is a crucial issue in logistic management. It must be managed effectively and efficiently to reduce the production cost as well as the customer satisfaction. A synchronized zoning system is a warehousing management policy, which aims to increase the warehouse utilization and customer satisfaction by reducing the customer waiting time. For that reason, they apply a particle swarm optimization to assign the products that will be collected by the client at a certain point in the network.

Based on the above, [77] mentions that in his bibliographical revision to the area of logistics in the auto parts sector, there are few applications that consider real cases and involve more complex problems to solve; without omitting significant variables for the process.

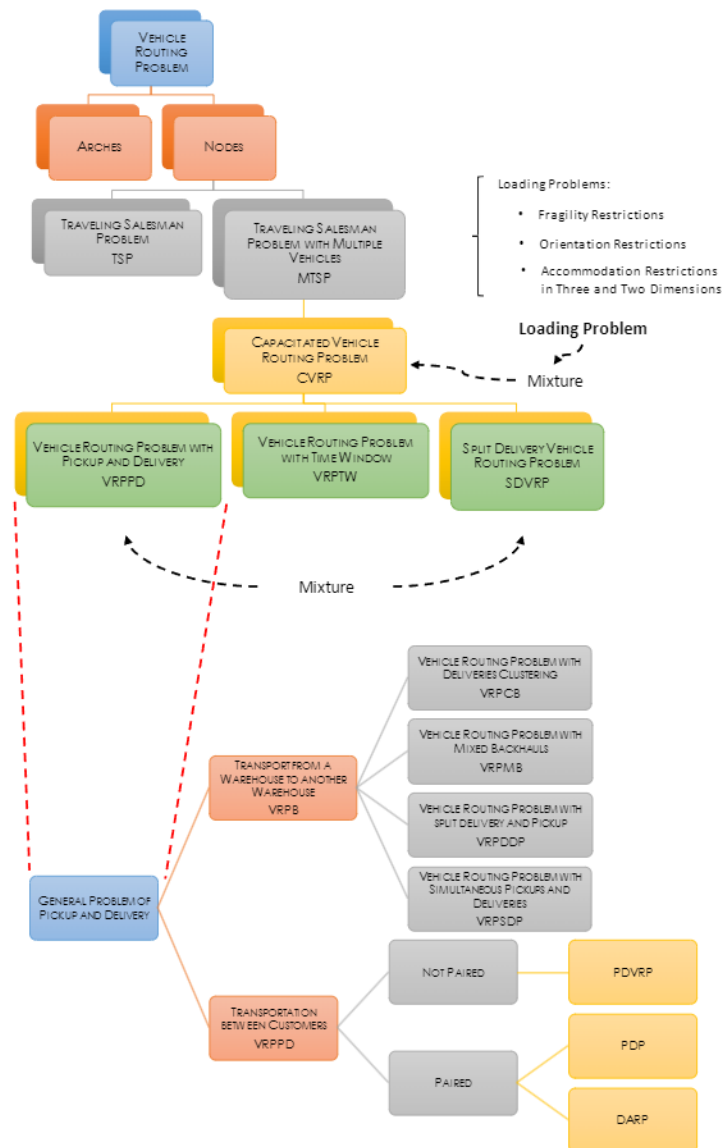


Fig. 1. Schematic classification of the different transport models; based on [25], [26] and [27]

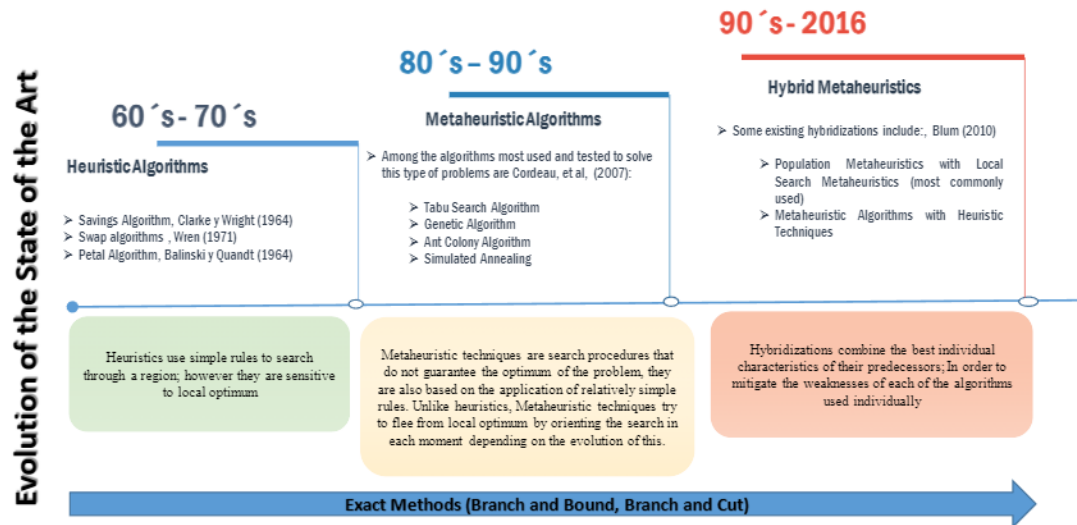


Fig. 2 Solution techniques evolution, based on [27] and [65]

Conclusions

Through state of the art previously shown, it can be concluded that due to the high complexity of the supply chain of the automotive industry, the different modes of consolidation and their possible mixtures can generate quite complex transport models that will be sometimes unique and can be only applied to a single company. without being able to reach a generalization.

In the analysis, the importance of the metaheuristic algorithms and their great contribution in the resolution of the transport models present in any industrial sector is observed. However, each time the solution methods seek to reflect more the reality that surrounds them trying to represent this reality through mathematical models; which can become multi-layer or multiplex networks, designed to model complex systems with their respective characteristics. Boysen et al. (2015), however, identifies the lack of real applications in the automotive sector of many of these models.

All this generates that some suppliers can be deprived of this system of collection; Forcing them to identify their transport models and optimize their distribution network.

However, the system is so complex that in many cases the traditional methods of solution are short in the face of the great demands of real problems. This has generated that these models evolve through the time, integrating more detail. Which increases the processing times for these, generating greater interest in heuristic techniques that offer good results in reasonable times of solution for a correct decision-making?

With the above mentioned, the reader is encouraged to interfere in the methodologies of complex systems in order to increase the levels of detail of the models and reduce the variability between these and reality.

Acknowledgments

I am grateful for the support to CONACYT for making this work possible; Likewise, I greatly thank my tutor Dr. Idalia Flores de la Mota whom I greatly esteem.

Bibliography

1. Golinska, P., 2014. *Environmental Issues in Automotive Industry*. 1st ed. London: Springer, EcoProduction.
2. Nakamichi, K., Hanaoka, S. & Kawahara, Y., 2016. Estimation of cost and CO2 emissions with a sustainable cross-border supply chain in the automobile industry: A case study of Thailand and neighboring countries. *Transportation Research Part D: Transport and Environment*, Volumen 43, p. 158–168.
3. Diaz, L., 2006. *Evaluation of Cooperative Planning in Supply Chains, An Empirical Approach of the European Automotive Industry*. 1st ed. Berlin, Germany: Gabler Edition Wissenschaft.
4. Ganesan, R., 2015. *The Profitable Supply Chain, A Practitioner's Guide*. 1st ed. New York, USA: Apress.
5. Thomé, A. y otros, 2014. A multi-tier study on supply chain flexibility in the automotive industry. *International Journal of Production Economics*, Volumen 158, p. 91–105.
6. Brar, G. & Saini, G., 2011. Milk Run Logistics: Literature Review and Directions. *Proceedings of the World Congress on Engineering*, Volumen 1, pp. 1-5.
7. Hosseini, S., Shirazi, M. & Karimi, B., 2014. Cross-docking and milk run logistics in a consolidation network: A hybrid of harmony search and simulated annealing approach. *Journal of Manufacturing Systems*, Volumen 3, p. 567–577.
8. Nemoto, T., Hayashi, K. & Hashimoto, M., 2010. Milk Run Logistics by Japanese Automobile Manufacturers in Thailand. *Procedia Social and Behavioral Sciences*, 2(3), pp. 5980-5989.
9. Boysen, N., Emde, S., Hoeck, M. & Kauderer, M., 2015. Part logistics in the automotive industry: Decision problems, literature review and research agenda. *European Journal of Operational Research*, 242(1), p. 107–120.
10. Zeng, T., Hu, D. & Huang, G., 2013. The Transportation Mode Distribution of Multimodal Transportation in Automotive Logistics. *Procedia - Social and Behavioral Sciences*, Volumen 96, p. 405 – 417 .
11. Lawson, G., Salanitri, D. & Waterfield, B., 2016. Future directions for the development of virtual reality within an automotive manufacturer. *Applied Ergonomics*, Volumen 53, pp. 323-330.
12. Chee, S., Chong, M. & Chin, J., 2012. Milk-run kanban system for raw printed circuit board withdrawal to surface-mounted equipment. *Journal of Industrial Engineering and Management*, 5(2), pp. 382-405.
13. Suthikarnnarunai, N., 2008. Automotive Supply Chain and Logistics Management. *Proceedings of the International MultiConference of Engineers and Computer Scientists*, Volumen 2, pp. 1-7.
14. Jiao, Y. & You, Z., 2014. Development and Application of Milk-Run Distribution Systems in the Express Industry Milk-Run Distribution Systems in the Express Industry. *Hindawi Publishing Corporation, Mathematical Problems in Engineering*, pp. 1-6.
15. Yun, L., Xian-long, G. & Chao-chun, S., 2010. Inventory-transportation integrated optimization based on milk-run model. *International Conference on E-Business and E-Government*, pp. 3372-3376.
16. Yildiz, H., Ravi, R. & Fairey, W., 2010. Integrated optimization of customer and supplier logistics at Robert Bosch LLC. *European Journal of Operational Research*, Volumen 207, p. 456–464.
17. Klineciewicz, J., 1990. Solving a Freight Transport Problem Using Facility Location Techniques. *Operations Research*, 38(1), pp. 99-109.
18. Andreatini, C., Sacomano, J. & Gandelman, G., 2014. Impacts of Automakers Milk Run Collect System on Suppliers Planning and on Urban City Emissions. *Advances in Production Management Systems. Innovative and Knowledge-Based Production Management in a Global-Local World*, Volumen 439, pp. 122-129.
19. Chiara, B. & Pellicelli, M., 2016. Sustainable road transport from the energy and modern society points of view: Perspectives for the automotive industry and production. *Journal of Cleaner Production*, Volumen 133, pp. 1283-1301.
20. Abdiaziz, O., Cheng, J., Tahar, R. & Varma, R., 2015. A hybrid Simulation model for Green Logistics Assessment in Automotive Industry. *Procedia Engineering*, Volumen 100, p. 960 – 969 .
21. Thierry, M., Salomon, M., Van Nunen, J. & Van Wassenhove, L., 1995. Strategic issues in product recovery management. *California Management Review*, 37(2), p. 114–135.
22. Das, K. & Chowdhury, A., 2012. Designing a reverse logistics network for optimal collection, recovery and quality-based product-mix planning. *Int. J. Production Economics*, Volumen 135, pp. 209-221.
23. Nieuwenhuis, P., Beresford, A. & Choi, A., 2012. Shipping or local production? CO2 impact of a strategic decision: An automotive industry case study. *Int. J. Production Economics*, Volumen 140, p. 138–14Choi.
24. Toro, E., Escobar, A. & Granada, M., 2016. Literature Review on the Vehicle Routing Problem in The Green Transportation Context. *Luna Azul*, Volumen 42, pp. 1-26.
25. Vijay Kumar, S., 2013. Issues in Solving Vehicle Routing Problem with Time Window and its Variants using Meta heuristics - A Survey. *International Journal of Engineering and Technology*, Volumen 3, pp. 668-672.
26. Parragh, S., Doerner, K. & Hartl, R., 2008. A survey on pickup and delivery problems; Part I: Transportation between customers and depot. *Journal für Betriebswirtschaft*, 58(1), pp. 21-51.
27. Bortfeldt, A. & Wascher, G., 2012. Container Loading Problems - A State of the Art Review. *Otto Von Guericke, Faculty of Economics and Management*, pp. 1-47.
28. Leung, S. 2013. A meta-heuristic algorithm for heterogeneous fleet vehicle routing problems with two-dimensional loading constraints. *European Journal of Operational Research*, 225(2), p. 199–210.
29. Dyckhoff, H., 1990. A Typology of Cutting and Packing Problem. *European Journal of Operational Research*, Volumen 44, pp. 145-159.
30. Wang, F., Tao, Y. & Shi, N., 2009. A Survey on Vehicle Routing Problem with Loading Constraints. *Computational Sciences and Optimization*, Volumen 2, pp. 602 - 606.

31. Gendreau, M., Iori, M., Laporte, G. & Martello, S., 2006. A tabu search algorithm for a routing and container loading problem. *Transportation Science*, 40(3), pp. 342-350.
32. Chen, S., 2008. Research on algorithms for three-Dimensional loading capacitated vehicle routing problem. MPhil Dissertation, Sun Yat-sen University, China.
33. Fuellerer, G., Doerner, K., Hartl, R. & Iori, M., 2010. Metaheuristics for vehicle routing problem with three-dimensional loading constraints. *European Journal of Operational Research*, 201(3), p. 751-759.
34. Fuellerer, G., Doerner, K., Hartl, R. & Iori, M., 2007. Metaheuristics for vehicle routing problems with loading constraints. *Networks*, 49(4), pp. 294-307.
35. Moura, A. & Oliveira, J., 2009. An integrated approach to the Vehicle Routing and Container Loading Problems. *OR Spectrum*, 31(4), p. 775-800.
36. Moura, A., 2008. A multi-objective genetic algorithm for the vehicle routing with time windows and loading problem. *Intelligent Decision Support*, Volumen 2, pp. 187-201.
37. Iori, M., 2004. Metaheuristic algorithms for combinatorial optimization problems. *Doctoral Dissertation, University of Bologna, Bologna, Italy*.
38. Iori, M., 2005. Metaheuristic algorithms for combinatorial optimization problems. *4OR*, 3(2), p. 163-166.
39. Iori, M., 2007. An exact approach for the vehicle routing problem with two-dimensional loading constraints. *Transportation Science*, 41(2), pp. 253-264.
40. Gendreau, M., Iori, M., Laporte, G. & Martello, S., 2008. A tabu search heuristic for the vehicle routing problem with two-dimensional loading constraints. *Networks*, 51(1), pp. 4-18.
41. Zachariadis, E., Tarantilis, C. & Kiranoudis, C., 2009. A guided tabu search for the vehicle routing problem with two-dimensional loading constraints. *European Journal of Operational Research*, 195(3), p. 729-743.
42. Fuellerer, G., Doerner, K., Hart, R. & Iori, M., 2009. Ant colony optimization for the two-dimensional loading vehicle routing problem. *Computers & Operations Research*, 36(3), p. 655-673.
43. Tarantilis, C.-D., Zachariadis, E., & Kiranoudis, C. (2009). A Guided Tabu Search for the Vehicle Routing Problem with Two-Dimensional Loading Constraints. *European Journal of Operational Research*, Vol. 195, 729-743.
44. Strodl, J., Doerner, K., Tricoire, F., & Hartl, R. (2010). On Index Structures in Hybrid Metaheuristics for Routing Problems with Hard Feasibility Checks: An Application to the 2-Dimensional Loading Vehicle Routing Problem. *Computer Science*, 160-173.
45. Leung, S., Zhou, X., Zhang, D., & Zheng, J. (2011). Extended guided tabu search and a new packing algorithm for the two-dimensional loading vehicle routing problem. *Computers & Operations Research*, Vol. 38, Issue 1, 205-215.
46. Duhamel, C., Lacomme, P., Quilliot, A., & Toussaint, H. (2011). A multi-start evolutionary local search for the two-dimensional loading capacitated vehicle routing problem. *Computers & Operations Research*, Vol. 38, Issue 3, 617-640.
47. Leung, S., Zhang, Z., Zhang, D., Hua, X., & Lim, M. (2013). A meta-heuristic algorithm for heterogeneous fleet vehicle routing problems with two-dimensional loading constraints. *European Journal of Operational Research*, Vol. 225, Issue, 2, 199-210.
48. Khebbache, S., Prins, C., Yalaoui, A., & Reghioui, M. (2013). Heuristics and memetic algorithm for the two-dimensional loading capacitated vehicle routing problem with time windows. *Central European Journal of Operations Research*, Vol. 21, Issue 2, 307-336.
49. Zachariadis, E., & Tarantilis, C. (2013). Integrated distribution and loading planning via a compact metaheuristic algorithm. *European Journal of Operational Research*, Vol. 228, Issue 1, 56-71.
50. Tarantilis, C. D., Zachariadis, E., & Kiranoudis, C. (2009). A Hybrid Metaheuristic Algorithm for the Integrated Vehicle Routing and Three-Dimensional Container-Loading Problem. *IEEE Transactions on Intellig*, Vol. 10, Issue 2, 255 - 271.
51. Fuellerer, G., Doerner, K., Hartl, R., & Iori, M. (2010). Metaheuristics for vehicle routing problems with three-dimensional loading constraints. *European Journal of Operational Research*, Vol. 201, Issue 3, 751-759.
52. Tarantilis, C., Zachariadis, E., & Kiranoudis, C. (2011). The Pallet-Packing Vehicle Routing Problem. *Transportation Science*, Vol. 46, Issue 3, 341 - 358.
53. Bortfeldt, A. (2012). A hybrid algorithm for the capacitated vehicle routing problem with three-dimensional loading constraints. *Computers & Operations Research*, Vol. 39, Issue 9, 2248-2257.
54. Homberger, J., & Bortfeldt, A. (2013). Packing first, routing second—a heuristic for the vehicle routing and loading problem. *Computers & Operations Research*, Vol. 40, Issue 3, 873-885.
55. Ceschia, S., & Schaerf, A. (2013). Local search for a multi-drop multi-container loading problem. *Journal of Heuristics*, Vol. 19, Issue 2, 275-294.
56. Junqueira, L., Oliveira, J., Carravilla, M., & Morabito, R. (2013). An optimization model for the vehicle routing problem with practical three-dimensional loading constraints. *International Transaction in Operational Research*, Vol. 20, Issue 5, 645-666 .
57. Kiranoudis, C., Zachariadis, E., & Tarantilis, C. (2013). Designing vehicle routes for a mix of different request types, under time windows and loading constraints. *European Journal of Operational Research*, Vol. 229, Issue 2, 303-317.
58. Gallotti, R. & Barthelemy, M., 2014. Anatomy and efficiency of urban multimodal mobility. *Physics and Society*, pp. 1-9.
59. Gallotti, R. & Barthelemy, M., 2015. The multilayer temporal network of public transport in Great Britain. *Scientific Data*, Volumen 2, pp. 1-8.
60. Velilla, M. y otros, 2002. *Manual de Iniciación Pedagógica al Pensamiento Complejo*. Primera Edición ed. Colombia: Instituto Colombiano de Fomento de la Educación Superior.
61. Weaver, W., 1948. Science and Complexity. *American Scientist*, 36(4), pp. 536-544.
62. Ladyman, J., Lambert, J. & Wiesner, K., 2013. What is a complex system?. *European Journal for Philosophy of Science*, 3(1), pp. 33-67.
63. Cotsaftis, M., 2009. What Makes a System Complex? - An Approach to Self Organization and Emergence. En: C. B. M. A. Aziz-Alaoui, ed. *Part of the series Understanding Complex Systems*. New York: Springer, pp. 49-99.

64. Heylighen, F., 2009. Complexity and Self-organization. En: T. &. Francis, ed. *Encyclopedia of Library and Information Sciences*. pp. 1215-1224.
65. Braekers, K., Ramaekers, K. & Van Nieuwenhuysse, I., 2016. The vehicle routing problem: State of the art classification and review. *Computers & Industrial Engineering*, Volumen 99, pp. 300-3013.
66. Martin, S. y otros, 2016. A multi-agent based cooperative approach to scheduling and routing. *European Journal of Operational Research*, Volumen 254, pp. 169-178.
67. Gendreau, M. & Potvin, J.-Y., 2010. *Handbook of Metaheuristic*. 2nd ed. California, USA: Springer.
68. Bortfeldt, A., 2012. A hybrid algorithm for the capacitated vehicle routing problem with three-dimensional loading constraints. *Computers & Operations Research*, Volume 39, Issue 9, September, p. 2248–2257
69. Zhang, X. & Tang, L., 2009. A new hybrid ant colony optimization algorithm for the vehicle routing problem. *Pattern Recognition Letters*, Vol. 30, p. 848–855.
70. Goksal, F., Karaoglan, I. & Altıparmak, F., 2013. A hybrid discrete particle swarm optimization for vehicle routing problem with simultaneous pickup and delivery. *Computers & Industrial Engineering*, 65(1), p. 39–53.
71. Männel, D. & Bortfeldt, A., 2016. A hybrid algorithm for the vehicle routing problem with pickup and delivery and three-dimensional loading constraints. *European Journal of Operational Research*, 254(3), p. 840–858.
72. Chen, Y., Hao, J. & Glover, F., 2016. A hybrid metaheuristic approach for the capacitated arc routing problem. *European Journal of Operational Research*, 253(1), p. 25–39.
73. Du, T., Wang, F. & Lu, P., 2007. A real-time vehicle-dispatching system for consolidating milk runs. *Transportation Research Part E: Logistics and Transportation Review*, 43(5), p. 565–577.
74. Arvidsson, N., 2013. The milk run revisited: A load factor paradox with economic and environmental implications for urban freight transport. *Transportation Research Part A: Policy and Practice*, Volumen 51, p. 56–62.
75. Hasani, A. & Hessameddin, S., 2016. A location-routing problem for cross-docking networks: A biogeography-based optimization algorithm. *Computers & Industrial Engineering*, Volumen 102, p. 132–146.
76. Kuo, R., Kuo, P., Chen, Y. & Zulfia, F., 2016. Application of metaheuristics-based clustering algorithm to item assignment in a synchronized zone order picking system. *Applied Soft Computing*, Volumen 46, p. 143–150.
77. Boysen, N., Emde, S., Hoeck, M. & Kauderer, M., 2015. Part logistics in the automotive industry: Decision problems, literature review and research agenda. *European Journal of Operational Research*, 242(1), p. 107–120.